

**JODHPUR VIDYUT VITRAN NIGAM LIMITED**

No.JdVVNL/MD/CE(C&P)/SE(RA&C)/JU/2008-09/D. 2118 Dt. 28.1.09

ORDER

Sub: Installation of 11 KV Ring Main Unit (RMU)/Ring Main Switch Fuse Unit for termination of 11KV underground service lines in the premises of prospective HT consumers under all categories in Jodhpur City.

Presently, the 11 KV service line cables of the applicants acquiring supply at 11 KV is terminated at the Discom's Distribution mains through a Double Pole(DP) mounted switchgears. Such DP mounted switchgears are installed on the public road but are often obstructive & unaesthetic to the applicant's premises. The premises holders normally intend to avoid installation of such large MS Steel structures in front of their premises. Moreover, the line metal parts on these overhead structures are exposed to all kind of external disturbances and thus prone to faults.

The matter was placed before the Board of Directors of Jodhpur Discom in its 146th meeting held on 24th December, 2008 for approval for installation of 11 KV "Ring Main Unit"(RMU) in Jodhpur City, for termination of 11 KV underground service lines in the premises of prospective HT consumers under all categories. It was decided in the BOD meeting that henceforth, the prospective HT consumers under all categories, will be required to provide 11 KV "Ring Main Unit"(RMU) for termination of their 11 KV service line cables at their own cost. The RMU to be provided shall be as per Discom's specifications under Discom's supervision.

As such following instructions are issued:

1. For feeders on which the work of under grounding of cable has been taken up or is proposed to be taken up including the list of feeders furnished by the J.D.A.(if any):-
 - (I) The (RMU) "Ring Main Unit" as per the requirement/design of Jodhpur Discom should be installed for H.T. supply connections & Building Complexes having contract demand/designed demand (For building complexes) above 500 KVA by prospective consumers.
 - (II) Prospective H.T. consumers of Building Complexes (s) having contract demand/designed demand (For building complexes) up to 500 KVA are allowed to provide "Ring Main Switch Fuse Unit" instead of "Ring Main Unit".

2. The Old system of releasing connection shall continue as hitherto where HT grounding works for feeders has not been taken up or is proposed to be taken up.

This order shall be applicable only in Jodhpur City. However this provision shall be optional for prospective HT consumers in the outer area of Jodhpur City.

By Order,

(M.S. FAGERIA)
CHIEF ENGINEER(C&P)
JODHPUR DISCOM:JODHPUR


Note: The order is also available on Jodhpur Discom's website www.jdvvn.com/www.rajenenergy.com

Copy Submitted/ forwarded to the following for information and necessary action:

- 1) The Director (Finance), Jodhpur Discom, Jodhpur.
- 2) The Director (Technical), Jodhpur Discom, Jodhpur.
- 3) The Chief Engineer/Zonal Chief Engineer (O&M-BKZ/JDZ), Jodhpur Discom, Bikaner/Jodhpur.
- 4) The Dy.Chief Engineer (MM&C), Jodhpur Discom, Jodhpur.
- 5) The Chief Accounts Officer, Jodhpur Discom, Jodhpur.
- 6) The T.A. to Chairman & Managing Director, Jaipur Discom Jaipur, for kind perusal of the Hon'ble C&MD.
- 7) The T.A. to Managing Director, Jodhpur Discom / Ajmer Discom, Jodhpur / Ajmer, for kind perusal of the Hon'ble MD.
- 8) The Superintending Engineer (CC / DC / O&M / BFL / PP&M / TW /Vig./ M&P/MM&C), Jodhpur Discom, Jodhpur / Pali / Barmer / Churu / Jalore / Sriganganagar / Hanumangarh / Bikaner / Jaisalmer
- 9) The Addl. S. P. (Vigilance), Jodhpur Discom, Jodhpur. With spare copies for distribution amongst vigilance officers.
- 10) The Sr.Accounts Officer/Accounts Officer (O&M-CC / DC / Comml. / Audit/ Rev), Jodhpur Discom, Jodhpur / Bikaner.
- 11) The Company Secretary, Jodhpur Discom, Jodhpur.
- 12) The Executive Engineer (O&M/DD...../A-B-C-Zone/City-I-II/ LC/ MIS/ DSM/ IA/ Training/Vigilance Jodhpur Discom,.....)
- 13) The Executive Engineer (IT), Jodhpur Discom, Jodhpur:Kindly host the order on Discom;s Website.
- 14) T.A. to Chief Engineer(C&P), Jodhpur Discom, Jodhpur.
- 15) The Public Relation Officer, Jodhpur Discom, Jodhpur.
- 16) The Assistant Engineer (O&M...../Rural/CSD-I-II-III.), Jodhpur Discom, with spare copies for distribution amongst all the JENS/ARO under your control.

(M.S. FAGERIA)
CHIEF ENGINEER(C&P)
JODHPUR DISCOM:JODHPUR


(A) ARRANGEMENT FOR TRANSFORMER CAPACITY UPTO 500KVA WITH LILO (OIL/SF-6 QUENCHING)

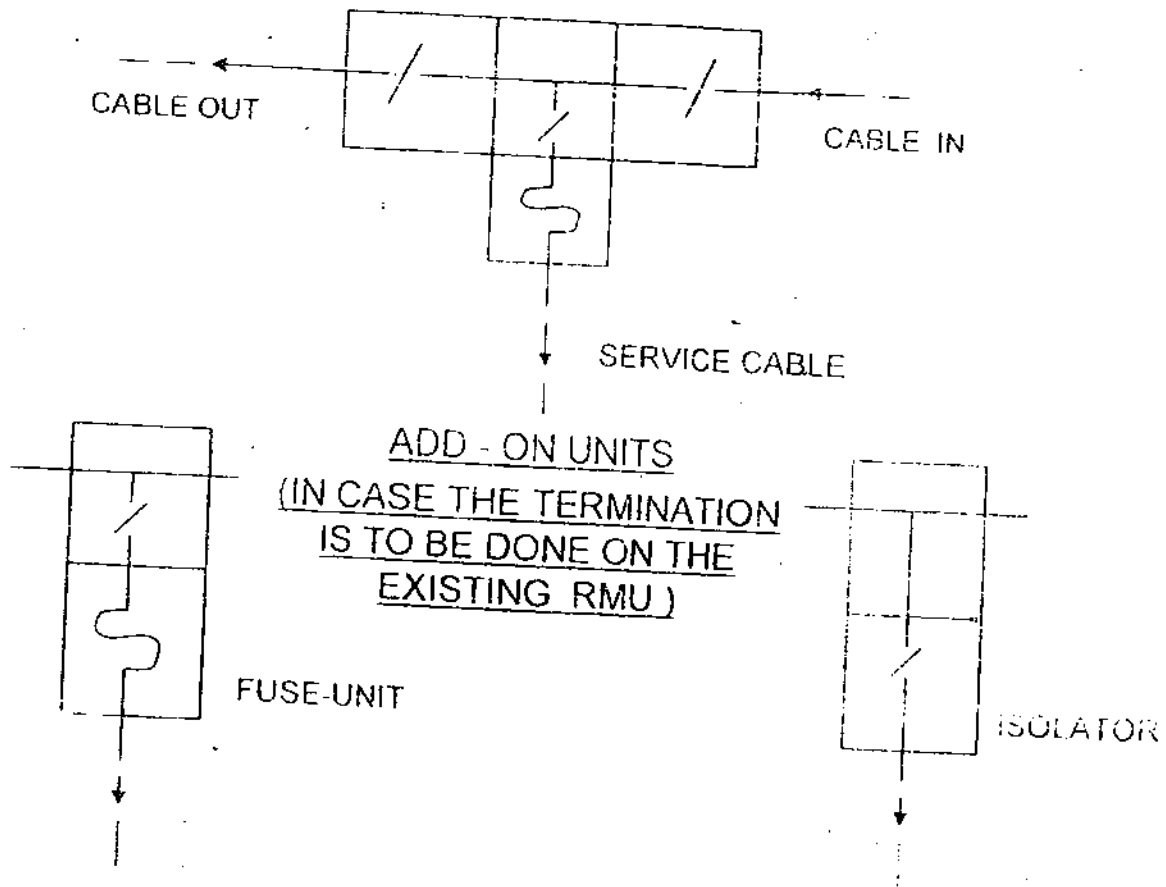

VENDORS-MAKES AVAILABLE

- 1). ABB.
- 2). CROMPTON GRIEVES
- 3). SCHNEIDER
- 4). SIEMENS
- 5). AREVA

(B) ARRANGEMENT FOR TRANSFORMER CAPACITY GREATER THAN 500KVA WITH LILO (VCB/SF-6 BREAKER)

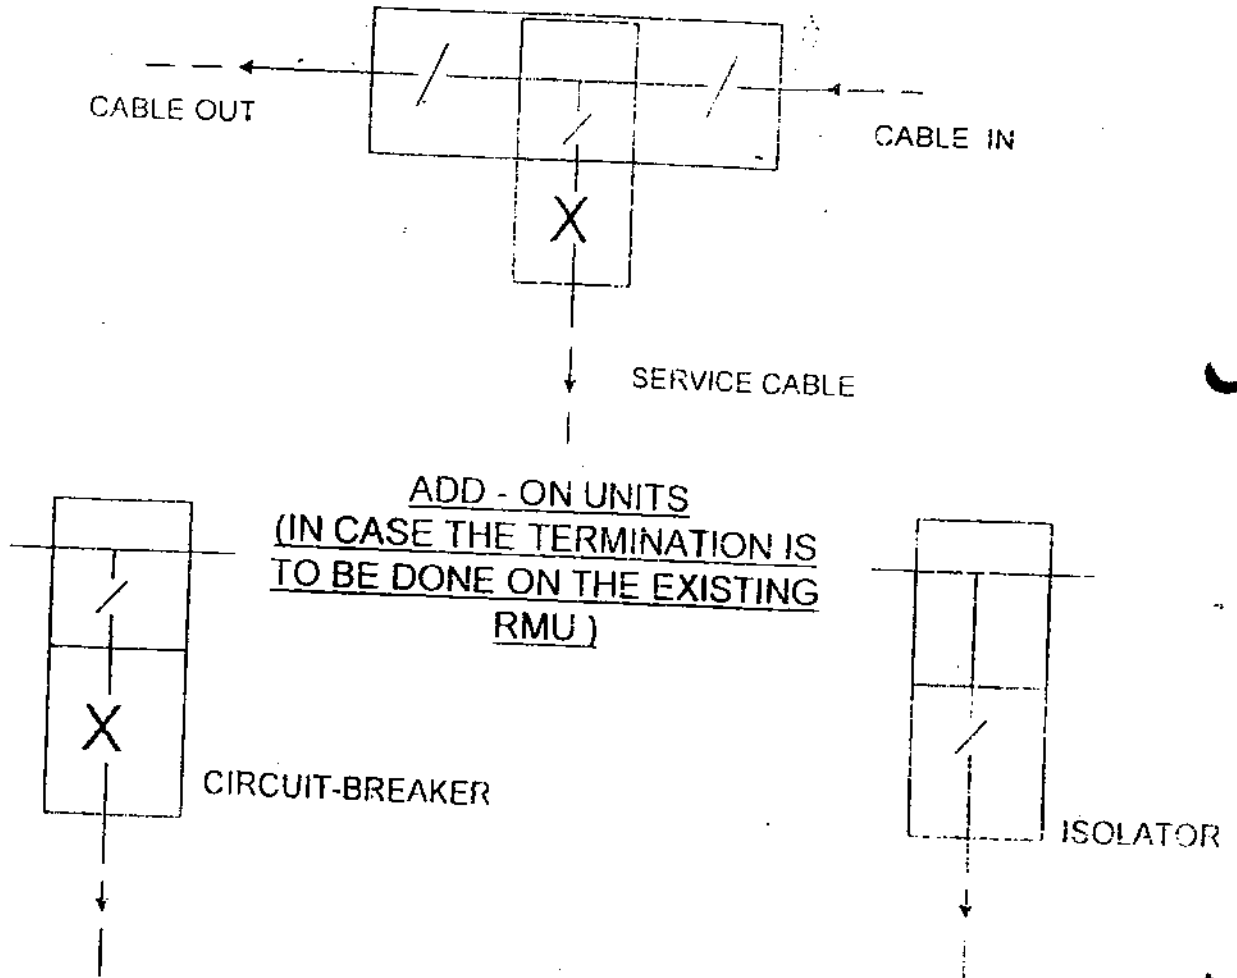

VENDORS MAKES AVAILABLE

- 1). ABB.
- 2). CROMPTON GRIEVES
- 3). SCHNEIDER
- 4). SIEMENS
- 5). AREVA